



- TRT Noise Generator, applicable for Tinnitus Retraining Therapy (TRT)
- White noise (adjustable)
- Low cut trimmer (LC)
- Volume Control (VC) for white noise level adjustment


Technical Data	EN 60118-7:2005 (2 ccm-coupler)	EN 60118-0:1994 (Ear Simulator)	ANSI S3.22-2003 (2 ccm-coupler)
Operating Voltage	1.30 V	1.30 V	1.30 V
Maximum Noise Level (RMS)	70 dB SPL	80 dB SPL	70 dB SPL
LC at Position "H"			
Frequency Range	200 Hz-5500 Hz	200 Hz-6500 Hz	200 Hz-5500 Hz
Battery Current	0.38 mA	0.38 mA	0.38 mA
Type	jump CIC TRT		
Battery Type	10		
Average Battery Life (Zinc-Air)	140 h		



**Factory settings:**  
LC at N (ccw)


These curves are measured with **Ear Simulator (EN 60318-4, fig. 2)**.  
All sound pressure levels are referred to 20 µPa.

**Noise Level**

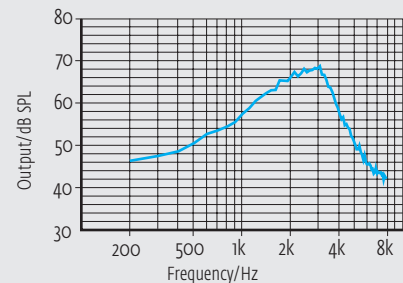


All curves are measured with **zccm-coupler (EN 60318-5, fig. 1)**. All sound pressure levels are referred to 20 µPa.


**Noise Level**

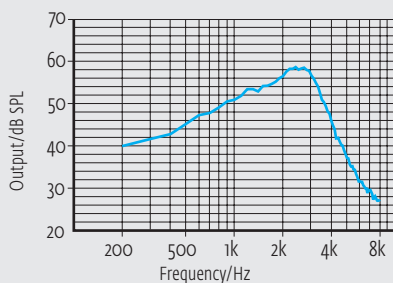

**Effect of LC**

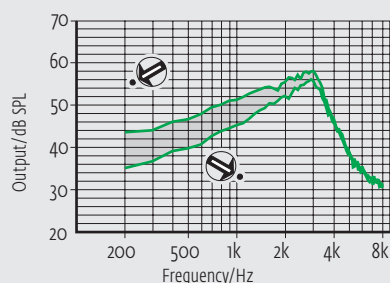

**Effect of VC-Poti**

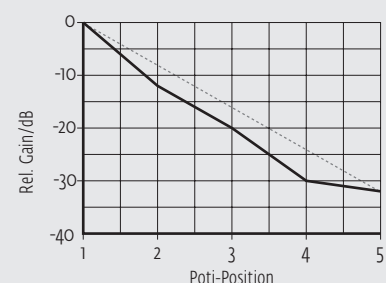

Technical data are subject to changes without notice.