

●● kami P




- 10k HD Sound
- Adaptive Sound Zoom
- Sound Zoom
- Adaptive Noise Guard
- Expansion (Squelch)
- Wind Shield
- Adaptive Feedback Guard
- Feedback Check
- 12 WDRC-Channels
- Multi Channel MPO
- Up to 4 Programs
- Rocker Switch (programmable)
- Low Battery Indicator
- Start-up Delay
- Battery Compartment Lock
- Direct Audio Input
- Auto T-Coil/Auto Phone
- T-Coil
- Tinnitus-Module
- Data Logging
- Live View
- MySound!
- nanoShield
- Option: Easy Thin Tube System

Technical Data

	EN 60118-7:2005 (2 cm ³ -coupler)	EN 60118-0/A1:1994 (Ear Simulator)	ANSI S3.22-2009 (2 cm ³ -coupler)
Operating Voltage	1,30 V	1,30 V	1,30 V
Acoustic Gain (50 dB SPL)			
HFA	67 dB	–	67 dB
1600 Hz	–	76 dB	–
Peak Value	71 dB	79 dB	71 dB
Max. Output (90 dB SPL)			
HFA	131 dB SPL	–	131 dB SPL
1600 Hz	–	137 dB SPL	–
Peak Value	137 dB SPL	141 dB SPL	137 dB SPL
Reference Test Gain	54 dB	60 dB	54 dB
Induction Coil Sensitivity	94 dB SPL	102 dB SPL	125 dB SPL
Frequency Range	100 Hz–6800 Hz	100 Hz–5500 Hz	100 Hz–6800 Hz
Total Harmonic Distortions			
500/800/1600 Hz	2/1/1 %	2/1/1 %	2/1/1 %
Equivalent Input Noise	24 dB	22 dB	24 dB
Battery Current	1,65 mA	1,31 mA	1,65 mA
Battery Type	13	13	13
Average Battery Life (Zinc-Air)	140 h	140 h	140 h
Tinnitusmasker[®]			
Noise Level (RMS)	111	118	111
Frequency Range	100 Hz–6400 Hz	100 Hz–8000 Hz	100 Hz–6400 Hz

* Only when Tinnitus-Module is activated in audifit.

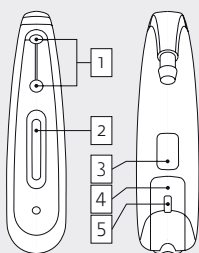

- 1 Dual Microphone system
- 2 Rocker switch
- 3 Cover flap for audio contacts
- 4 Battery compartment/On-Off-switch
- 5 Battery compartment lock

Standard




Programming

Cable: Cable set H or I
 Battery: without Battery
 Progr.-Box: HI-PRO/HI-PRO II
 HI-PRO USB
 NOAHlink
 Software: audifit 5.5




●● kami P

Fitting Range

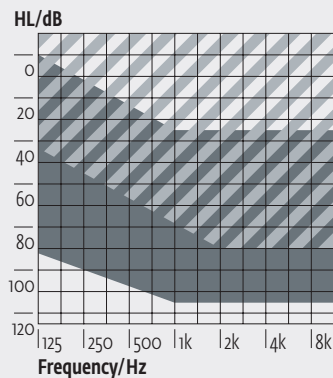

The shaded area applies to the kami P with Easy Thin Tube Option.


Third Octave Band Noise**

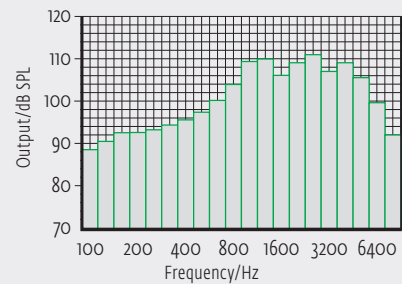


** All curves are measured with 2cm³-coupler (EN 60318-4:2010). Only when Tinnitus-Module is activated in audifit.

All curves are measured with Ear Simulator (EN 60318-4:2010) in reference setting.


Maximum Output

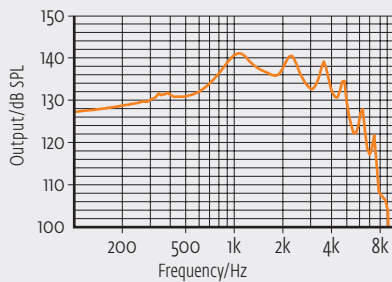

Acoustic Gain

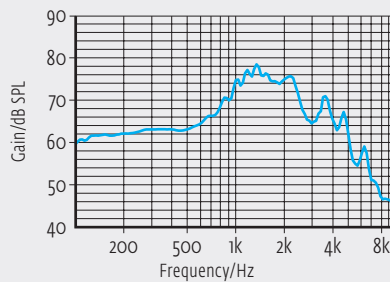


Frequency Response (RTG)

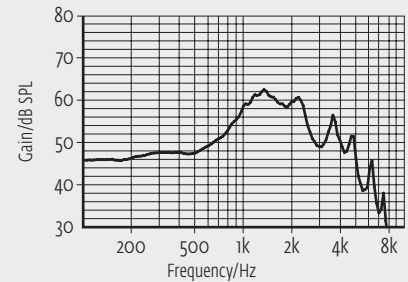


All curves are measured with 2cm³-coupler (EN 60318-5:2006) in reference setting.


Maximum Output

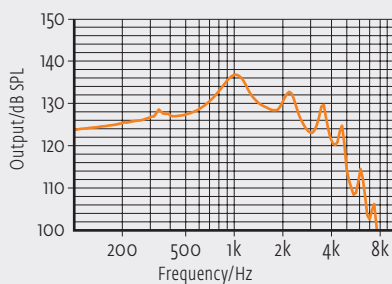


Acoustic Gain

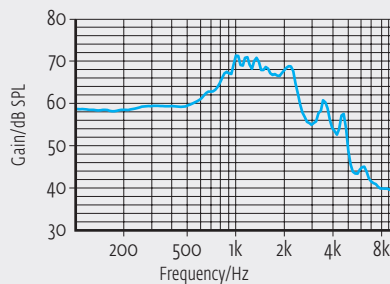

Frequency Response (RTG)

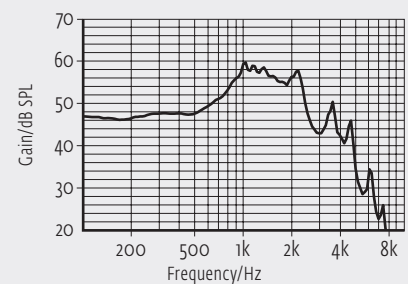

Induction Coil Sensitivity

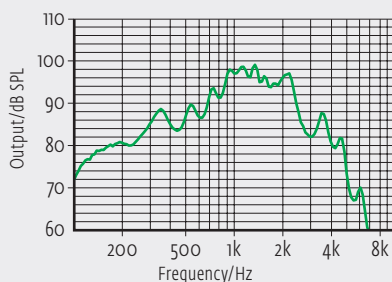

On account of the complex signal processing, the measurements of the represented curves are only possible in default setting of the device and under use of the current valid software version. Effects of the separate parameters see software.