



- Number of programs: 1
- White noise (adjustable)
- Low Battery Indicator
- Low Cut Filter
- High Cut Filter


| Technical Data | EN 60118-7:2005 (2 ccm-coupler) | EN 60118-0:1994 (Ear Simulator) | ANSI S3.22-2003 (2 ccm-coupler) |
|--|------------------------------------|------------------------------------|------------------------------------|
| Tinnitusmasker | | | |
| Operating Voltage | 1.30 V | 1.30 V | 1.30 V |
| Noise Level (RMS) | 70 dB SPL | 80 dB SPL | 70 dB SPL |
| Frequency Range | <200 Hz-8000 Hz | <200 Hz-8000 Hz | <200 Hz-8000 Hz |
| Battery Current | 0.41 mA | 0.41 mA | 0.41 mA |
| Battery Type | 10 | 10 | 10 |
| Average Battery Life (Zinc-Air) | 220 h | 220 h | 220 h |

Programming (4pin. System)

- Cable: Cable set D or G
- Battery: with Battery
- Progr.-Box: HI-PRO
HI-PRO USB
MicroCard
NOAHlink
- Software: audifit 4.4.0

These curves are measured with **Ear Simulator (EN 60318-4)**.
All sound pressure levels are referred to 20 µPa.

Third Octave Band Noise

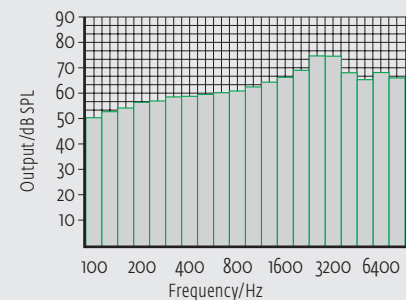

Technical data are subject to changes without notice.

