



- Number of programs: 1
- White noise (adjustable)
- Low Battery Indicator
- Low Cut Filter
- High Cut Filter

Technical Data	EN 60118-7:2005 (2 ccm-coupler)	EN 60118-0:1994 (Ear Simulator)	ANSI S3.22-2003 (2 ccm-coupler)
Tinnitusmasker			
Operating Voltage	1.30 V	1.30 V	1.30 V
Noise Level (RMS)	100 dB RMS	100 dB RMS	100 dB RMS
Frequency Range	<200 Hz-8000 Hz	<200 Hz-8000 Hz	<200 Hz-8000 Hz
Battery Current	0.41 mA	0.41 mA	0.41 mA
Battery Type	10	10	10
Average Battery Life (Zinc-Air)	440 h	440 h	440 h


Note: A maximum noise level of 80dB is recommended for the TRT Noise Generator when being used by an individual with normal hearing; higher noise levels may cause permanent damage to one's hearing. All switch TRT devices are set to a maximum noise level of 80 db.

Programming (4pin. System)

- Cable: Cable set D or G
- Battery: with Battery
- Progr.-Box: HI-PRO
HI-PRO USB
MicroCard
NOAHlink
- Software: audifit 4.5.0

These curves are measured with **Ear Simulator (EN 60318-4, fig. 2)**.
All sound pressure levels are referred to 20 µPa.

Third Octave Band Noise

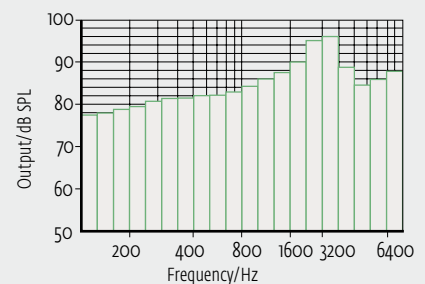

Technical data are subject to changes without notice.

