



- TRT Noise Generator, applicable for Tinnitus Retraining Therapy (TRT)
- White noise (adjustable)
- Number of Programs: 4
- Program Switch Tones (programmable)
- Low Battery Indicator (adjustable)
- Noise Level (programmable)

Technical Data	EN 60118-7:2005 (2 ccm-coupler)	EN 60118-0:1994 (Ear Simulator)	ANSI S3.22-2003 (2 ccm-coupler)
<b>Tinnitusmasker</b>			
Noise Level (RMS) in dB SPL	100	110	100
Frequency Range in Hz	200-6000	200-6700	200-6000
<b>Battery Current</b>	<0.9 mA	<0.9 mA	<0.9 mA
<b>Battery Type</b>	312	312	312
<b>Average Battery Life (Zinc-Air)</b>	160 h	160 h	160 h



**Note:** A maximum noise level of 80dB is recommended for the TRT Noise Generator when being used by an individual with normal hearing; higher noise levels may cause permanent damage to one's hearing. All switch TRT devices are set to a maximum noise level of 80 db.

1 Cover flap/switch  
2 Battery Compartment/on/off

Standard

**Programming**

Cable: Cable set B or E  
 Battery: without Battery  
 Progr.-Box: HI-PRO  
                   HI-PRO USB  
                   MicroCard  
                   NOAHlink  
 Software: audifit 4.3.0

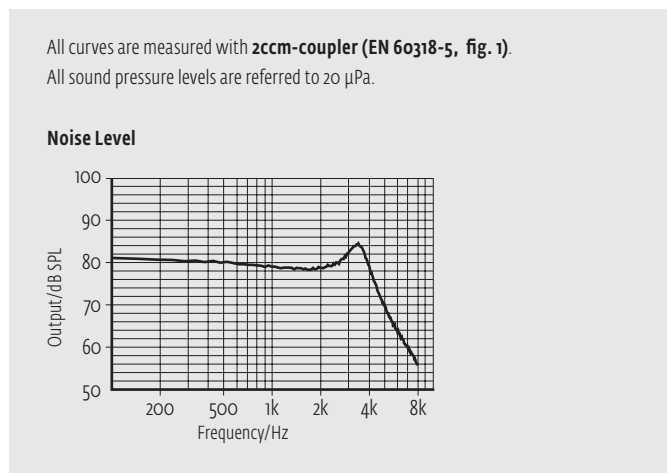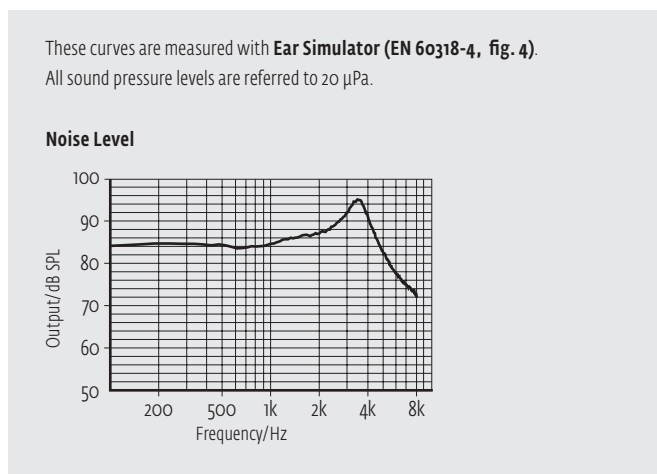

**Note:** switch TRT requires receiver unit B.

Technical data are subject to changes without notice.