



- Wireless Connectivity
- easyclick
- Binaural Telephony
- Sound Dynamix
- Adaptive Directional Microphone (ADM)
- Adaptive Feedback Cancellation (AFC²)
- Adaptive Noise Reduction (ANR)
- Notch Filter (manuell)
- Expansion (Squelch)
- Data Logging
- Number of Programs: 4*
- Program Switch Tones (programmable)
- WDRC-Channels: 8
- Channels: 16
- Low Battery Indicator (programmable)
- Water repellent coating
- Options: Volume Control, Program Switch, Auto T-Coil, Auto Phone, T-Coil

* 4 programs incl. Auto T-Coil/Auto Phone; 6 programs within automatic program


Technical Data	EN 60118-7: 2005 (2 ccm-coupler)	EN 60118-0: 1994 (Ear Simulator)	ANSI S3.22-2003 (2 ccm-coupler)
Operating Voltage	1.30 V	1.30 V	1.30 V
Acoustic Gain (50 dB SPL)			
HFA	56 dB	-	56 dB
1600 Hz	-	64 dB	-
Peak Value	62 dB	72 dB	62 dB
Max. Output (90 dB SPL)			
HFA	113 dB SPL	-	113 dB SPL
1600 Hz	-	120 dB SPL	-
Peak Value	117 dB SPL	127 dB SPL	117 dB SPL
Reference Test Gain	36 dB	43 dB	36 dB
Induction Coil Sensitivity	76 dB SPL	83 dB SPL	101 dB SPL
Frequency Range	100 Hz-8000 Hz	100 Hz-8000 Hz	100 Hz-8000 Hz
Total Harmonic Distortions			
500/800/1600 Hz	1/1/1 %	1/1/1 %	1/1/1 %
Equivalent Input Noise¹	15 dB	18 dB	15 dB
Battery Current	0.88 mA	0.96 mA	0.88 mA
Battery Type	13	13	13
Average Battery Life (Zinc-Air)	260 h	260 h	260 h

¹ Expansion (Squelch) = 36 dB SPL

PROGRAMMING


Cable: Cable set C, D, E or F
 Battery: with Battery
 Progr.-Box: HI-PRO
 HI-PRO USB
 HI-PRO II
 NOAHlink
 Software: audifit 5.3

FITTING RANGE

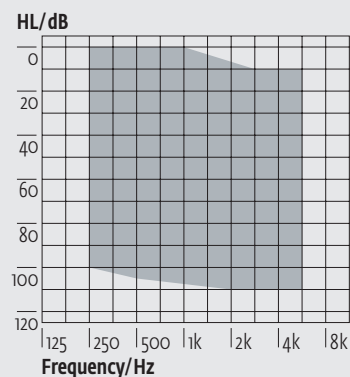


These curves are measured with **Ear Simulator (EN 60318-4)**. All sound pressure levels are referred to 20 μ Pa.


Maximum Output

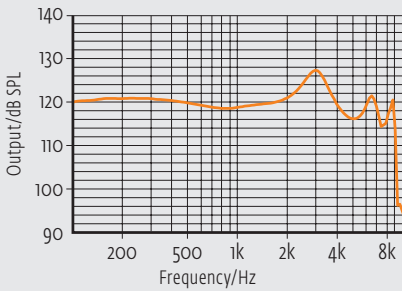

Acoustic Gain

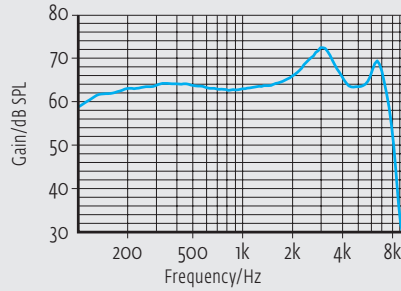


Frequency Response (RTG)

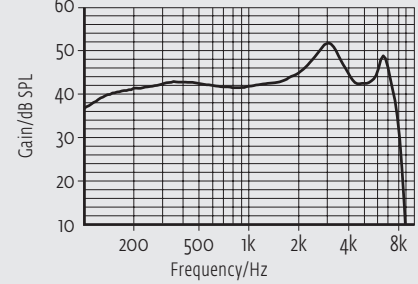


All curves are measured with **2ccm-coupler (EN 60318-5)**. All sound pressure levels are referred to 20 μ Pa.


Maximum Output

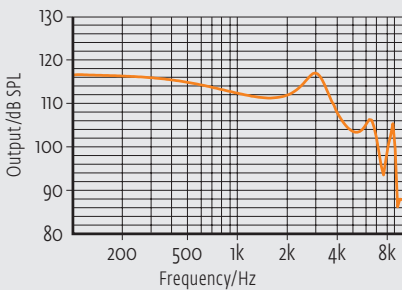


Acoustic Gain

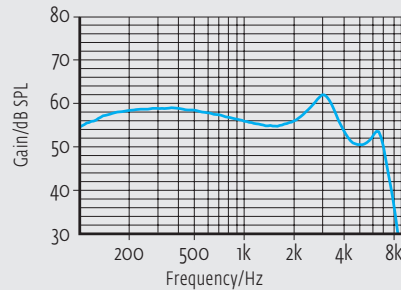

Frequency Response (RTG)

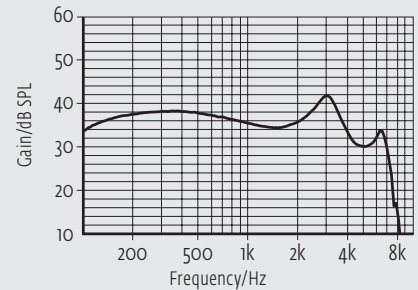

Third Octave Band Noise

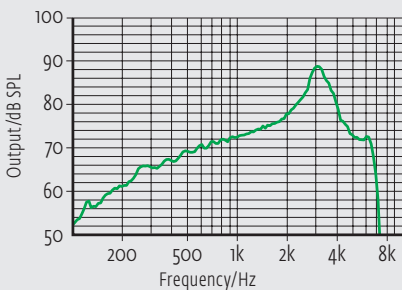

On account of the complex signal processing, the measurements of the represented curves are only possible in default setting of the device and under use of the current valid software version. Effects of the separate parameters see software.