





- Wireless Connectivity
- easyclick
- Binaural Telephony
- Sound Dynamix
- Adaptive Directional Microphone (ADM)
- Adaptive Feedback Cancellation (AFC²)
- Adaptive Noise Reduction (ANR)
- Notch Filter (manual)
- Expansion (Squelch)
- Data Logging
- Auto T-Coil or Auto Phone
- Tasterwippe (programmierbar)
- Number of Programs: 4*
- WDRG-Channels: 8
- Channels: 16
- Low Battery Indicator (programmable)
- Battery compartment lock
- Direct Audio Input
- TRT Noise Generator
- Water repellent coating
- Option: Easy Thin Tube System

* 4 programs incl. Auto T-Coil/Auto Phone; 6 programs within automatic program

Technical Data	EN 60118-7: 2005 (2 ccm-coupler)	EN 60118-0: 1994 (Ear Simulator)	ANSI S3.22-2003 (2 ccm-coupler)
Operating Voltage	1.30 V	1.30 V	1.30 V
Acoustic Gain (50 dB SPL)			
HFA	65 dB	–	65 dB
1600 Hz	–	75 dB	–
Peak Value	72 dB	77 dB	72 dB
Max. Output (90 dB SPL)			
HFA	130 dB SPL	–	130 dB SPL
1600 Hz	–	136 dB SPL	–
Peak Value	136 dB SPL	141 dB SPL	136 dB SPL
Reference Test Gain	52 dB	61 dB	52 dB
Induction Coil Sensitivity	92 dB SPL	99 dB SPL	127 dB SPL
Frequency Range	100 Hz–6100 Hz	100 Hz–6300 Hz	100 Hz–6100 Hz
Total Harmonic Distortions			
500/800/1600 Hz	2/2/1 %	2/1/1 %	2/2/1 %
Equivalent Input Noise¹	15 dB	13 dB	15 dB
Battery Current	0.85 mA/3.40 mA	0.85 mA/3.40 mA	0.85 mA/3.40 mA
Battery Type	13	13	13
Average Battery Life (Zinc-Air)²	270 h/70 h	270 h/70 h	270 h/70 h
Tinnitusmasker			
Noise Level (RMS)	113	119	113
Frequency Range	<100 Hz–6400 Hz	<100 Hz–8000 Hz	<100 Hz–6400 Hz

¹ Expansion (Squelch) = 38 dB SPL ² with integrated radio link in sleep mode/with integrated radio link in active mode

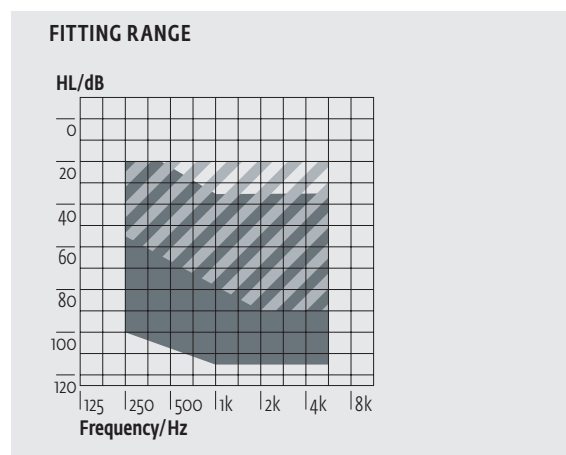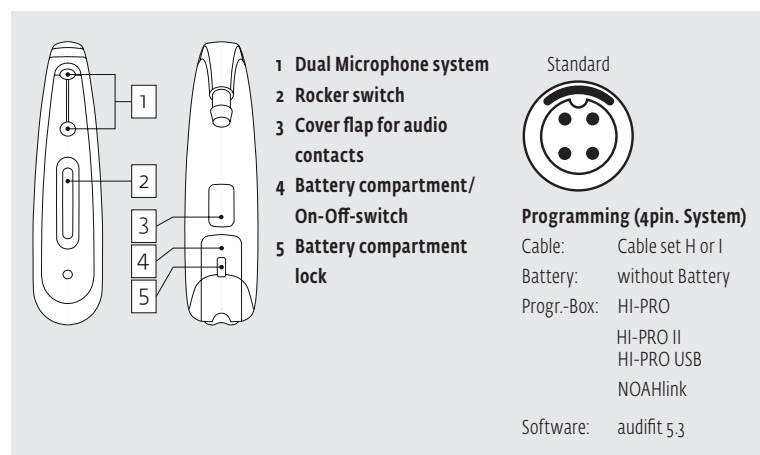


The shaded area applies to the faro P TRT with Easy Thin Tube Option.




These curves are measured with **Ear Simulator (EN 60318-4)**. All sound pressure levels are referred to 20 μ Pa.


Maximum Output

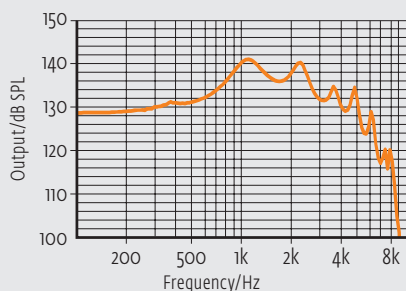


Acoustic Gain

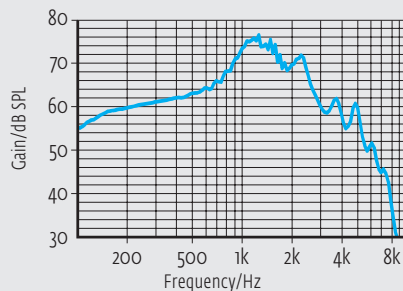

Reference Test Gain (RTG)

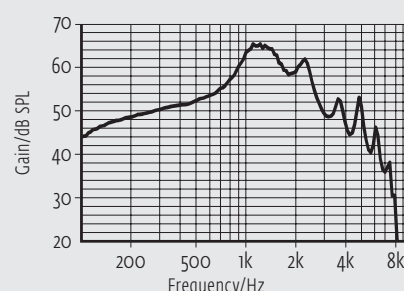


Third Octave Band Noise

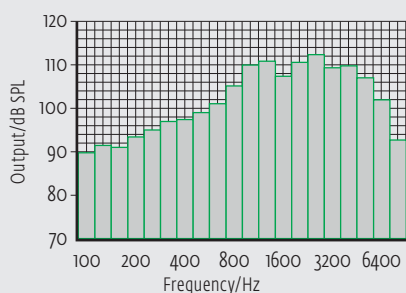


All curves are measured with **2ccm-coupler (EN 60318-5)**. All sound pressure levels are referred to 20 μ Pa.


Maximum Output

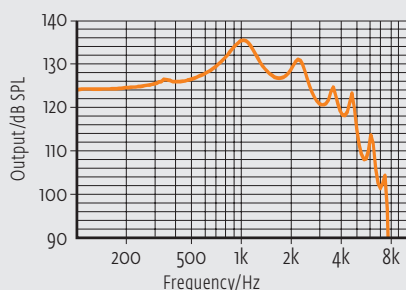


Acoustic Gain

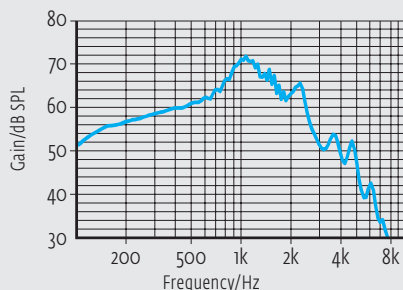

Frequency Response (RTG)

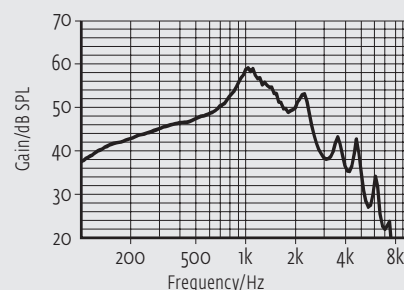

Induction Coil Sensitivity

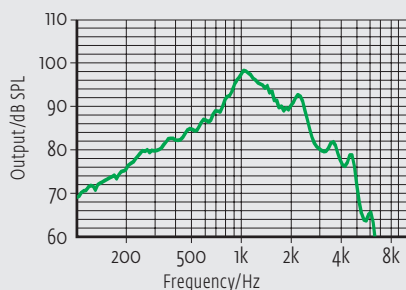

On account of the complex signal processing, the measurements of the represented curves are only possible in default setting of the device and under use of the current valid software version. Effects of the separate parameters see software.